

**Cub Cadet**

**Cub Cadet**

**ENDURO SERIES™**



You can find the current prices (RRP) on our website at [pricelist.cubcadet.eu](http://pricelist.cubcadet.eu)  
Or open the file directly with the QR code.

Stanley Black & Decker Outdoor GmbH  
Wiesenstraße 9 • 66129 Saarbrücken • GERMANY

Germany  
Phone +49 (0)681 96 98 90 69  
[cubservice.de@mtdproducts.com](mailto:cubservice.de@mtdproducts.com)

Austria  
Phone +43 (0)720 81 60 88  
[cubservice.at@mtdproducts.com](mailto:cubservice.at@mtdproducts.com)

Switzerland  
Phone +41 (0)43 58 81 35 9  
[cubservice.ch@mtdproducts.com](mailto:cubservice.ch@mtdproducts.com)

[www.cubcadet.eu](http://www.cubcadet.eu)

© 2022 Stanley Black & Decker Outdoor GmbH, Germany. All rights reserved. Cub Cadet and other trademarks are registered trademarks of Stanley Black & Decker. For more information, simply go to our website: [www.cubcadet.eu](http://www.cubcadet.eu). We reserve the right to make changes to prices, technical features and changes due to printing and other errors.

As of 08/2022



**WINTER  
PROGRAM  
2022/23**

## Cub Cadet® X SERIES SNOW THROWERS

### HEATED HAND GRIPS

Keep your hands warm from start to finish.

### CLUTCH LOCK

The clutch lock system keeps both the drive and auger clutch engaged. This lets you change the chute direction or ground speed during operation.

### POWERFUL ENGINE

The Cub Cadet 4-cycle OHV winter engines are especially developed for low temperature operation.

### X-TRAC TIRES

Powerful grip on snowy roads and walkways.



### TRACK DRIVE (XS3 76 TDE)

Adjusting track drive allows for three levels of operating depending on snow conditions and surface type, giving you peace of mind on slopes and inclines.

### POLYMER SKID SHOES

To adjust the distance between the shave plate and the surface. Easy to change.

### WORKING LIGHTS

LED headlights for better visibility in poor lighting conditions.

### 230V ELECTRIC START

### CHUTE CONTROL

The two levers allow you to change direction of the chute in 2 dimensions.


UP TO 76 CM CLEARING WIDTH  
(XS3 76 SWE and XS3 76 TDE)

## THE RIGHT POWER FOR TOUGH WINTER CONDITIONS

The X Series snow throwers from Cub Cadet offer the right size and technology for your local winter conditions. From 2-stage for medium to heavy snowfall to our 3-stage models that can handle even densely packed snow.

### 2-STAGE TECHNOLOGY (XS2)

At the first stage, numerous "X-treme" segments, which are mounted at an exact right angle to the drive direction, work their way even through harsh and densely packed snow by pulling it into the auger. The second stage is a fast rotating impeller which throws the snow out through the chute channel.

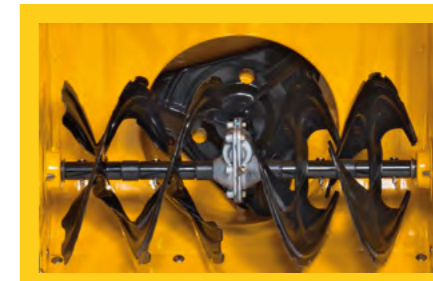

- For medium to heavy snow fall
- Ideal for sidewalks, parking lots, etc.

### 3-STAGE TECHNOLOGY (XS3)

During the first stage two lateral X-treme augers eat away the snow, moving it towards to the center, where the second stage X-treme auger drills through the ice and snow. But it does more than just drill, it also picks up the snow coming from the lateral segments and pushes it back towards the chute pulling the entire machine forward. Finally, the third stage impeller throws the snow through the 200° adjustable chute channel.



- For heavy and wet snow conditions
- Ideal for larger areas



## XS2 61 SWE

## XS3 66 SWE

ENGINE		
4-cycle OHV winter engine	Cub Cadet	Cub Cadet
Engine displacement	208 cm³	420 cm³
Rated power	4,0 kW / 3.600 min <sup>-1</sup>	7,8 kW / 3.600 min <sup>-1</sup>
Engine start	230V electric start + recoil	230V electric start + recoil
Tank volume (capacity)	2,0 l	4,8 l
AUGER SYSTEM		
Clearing width/intake height	61 cm / 53 cm	66 cm / 58 cm
Skid shoes	Heavy duty polymer – helps prevent scratches	Heavy duty polymer – helps prevent scratches
Auger diameter/material	30 cm/steel	30 cm/steel
Auger system	2-stage, with Xtreme-Auger segments	3-stage, with Xtreme-Auger segments
Impeller diameter	30 cm	30 cm
Grease fittings	On auger bearings	Low maintenance
DRIVE SYSTEM		
Power Steering	Zero turning circle system	Zero turning circle system
Speeds	6 forward/2 reverse	6 forward/2 reverse
Wheels (in inch)	15 x 5, X-Trac bolded, Winter tread	16 x 4,8, X-Trac bolded Winter tread
CHUTE SYSTEM		
Chute rotation	crank/200°	crank/200°
Pitch control	2-way-lever	2-way-lever
COMFORT		
Heated hand grips	Standard	Standard
Headlight	28 V / 28 W	28 V / 28 W
DIMENSIONS		
LpA/LwA/LwAg	88/98/100 dB (A)	89/99/101 dB (A)
Vibration value hand/arm / K-factor	5,0 / 1,5 m/s <sup>2</sup>	5,0 / 1,5 m/s <sup>2</sup>
Dimensions (L/W/H)	137 cm / 65 cm / 111 cm	140 cm / 72 cm / 110 cm
Net weight	84 kg	116 kg

Model number	31AW5BKR603	31AY5EVX603
EAN		

## XS3 71 SWE















## XS3 76 SWE

## XS3 76 TDE

ENGINE			
4-cycle OHV winter engine	Cub Cadet	Cub Cadet	Cub Cadet
Engine displacement	420 cm³	420 cm³	420 cm³
Rated power	7,8 kW / 3.600 min <sup>-1</sup>	7,8 kW / 3.600 min <sup>-1</sup>	7,8 kW / 3.600 min <sup>-1</sup>
Engine start	230V electric start + recoil	230V electric start + recoil	230V electric start + recoil
Tank volume (capacity)	4,8 l	4,8 l	4,8 l
AUGER SYSTEM			
Clearing width/intake height	71 cm / 58 cm	76 cm / 58 cm	76 cm / 58 cm
Skid shoes	Heavy duty polymer – helps prevent scratches	Heavy duty polymer – helps prevent scratches	Heavy duty polymer – helps prevent scratches
Auger diameter/material	30 cm/steel	30 cm/steel	30 cm/steel
Auger system	3-stage, with Xtreme-Auger segments	3-stage, with Xtreme-Auger segments	3-stage, with Xtreme-Auger segments
Impeller diameter	30 cm	30 cm	30 cm
Grease fittings	Low maintenance	Low maintenance	Low maintenance
DRIVE SYSTEM			
Power Steering	Zero turning circle system	Zero turning radius system	Zero turning circle system
Speeds	6 forward/2 reverse	6 forward/2 reverse	6 forward/2 reverse
Wheels (in inch)	16 x 6,5, X-Trac bolded Winter tread	16 x 6,5, X-Trac bolded Winter tread	Track drive
CHUTE SYSTEM			
Chute rotation	crank/200°	crank/200°	crank/200°
Pitch control	2-way-lever	2-way-lever	2-way-lever
COMFORT			
Heated hand grips	Standard	Standard	Standard
Headlight	28 V / 28 W	28 V / 28 W	28 V / 28 W
DIMENSIONS			
LpA/LwA/LwAg	90/100/102 dB (A)	90/100/102 dB (A)	91/101/103 dB (A)
Vibration value hand/arm / K-factor	5,0 / 1,5 m/s <sup>2</sup>	5,0 / 1,5 m/s <sup>2</sup>	5,0 / 1,5 m/s <sup>2</sup>
Dimensions (L/W/H)	140 cm / 77 cm / 110 cm	140 cm / 80 cm / 110 cm	137 cm / 80 cm / 110 cm
Net weight	118 kg	120 kg	125 kg

Model number	31AY5EVY603	31AY5EVZ603	31AY7EVZ603
EAN			

## ACCESSORIES FOR SNOW THROWERS (ALL SOLD SEPARATELY)

DOZER BLADE AND RUBBER LIP		
For all Cub Cadet 2X and 3X series augers. Working width 100 cm, fully galvanized, easy to mount/unmount after initial assembly, weight including packaging 20 kg		Mod. no.: 396-004-678
Rubber lip – universal for all dozer blades		Mod. no.: 396-005-678
SHEAR BOLTS		
The shear bolts connect the clearing auger with the drive shaft. Fits XS2 Model – set of 4 bolts and pins. Weight (incl. packaging) 0,07 kg.		Mod. no.: 7011-M6-0010
Fits XS3 Models – set of 6 bolts and pins		Mod. no.: 19A3101A603
COVER FOR SNOW THROWERS		
Fits all Cub Cadet snow throwers. Sturdy vinyl cover with tensioning cords, waterresistant, dimensions approx. L 170 / W 80 / H 100 cm, weight: incl. packaging 1,3 kg		Mod. no.: 2024-U1-0005
WINTER ENGINE OIL		
Special winter engine oil (SAE 5W-30) recommended for all Cub Cadet winter engines, capacity 1000 ml, weight incl. packaging 0,95 kg		Mod. no.: 6012-X1-0040
FUEL STABILIZER "EASY-RUN"		
Binds water and protects the system. Helps your engine start up reliably. Contents: 250 ml, weight: incl. packaging 0,25 kg		Mod. no.: 6012-X1-0045
WINTER EQUIPMENT FOR LAWN TRACTORS (ALL SOLD SEPARATELY)		
DOZER BLADE AND RUBBER LIP		
117 cm dozer blade for LT Series		Mod. no.: OEM-190-833
117 cm dozer blade for LT and XT Series		Mod. no.: 19A30017OEM
Rubber lip – universal – for all dozer blades		Mod. no.: 196-718-678
Installation Kit – for attaching OEM-190-833 in the XT Series		Mod. no.: 196-584-000
SNOW THROWERS		
Mounted snow thrower for XT Series side discharger, 107 cm, 3-stepped		Mod.-Nr.: 19A40024100
Mounted snow thrower for XT Series rear discharger, 107 cm, 3-stepped		Mod.-Nr.: 19A40045OEM
TRAILER		
Tow steel dump cart, single-axle tipper, removable tailgate, capacity max.: 340 kg, dimensions approx. (L/W/H): 177,8 / 83,8 / 73,7 cm, loading area approx. (L/B/H) 124,5 / 82,5 / 30,5 cm, weight (approx.): 70 kg		Mod. no.: 196-507-000

AGRICULTURAL TIRES		
Chevron style rear wheels 18" x 9,5". Set consists of 2 cpl. wheels. Fits tractors with either 18" or 20" rear wheels. Not approved for XT3 models.		Mod. no.: 196-721A678
TIRE CHAINS		
For 20" x 8,0" wheels incl. Adapter		Mod. no.: 196-658-699
For 18" x 9,5" wheels incl. Adapter		Mod. no.: 196-898-699
For XT 22" x 9,5" x 12" and 23" x 9,5" x 12" wheels		Mod. no.: 490-241-0025
ELECTRIC SPREADER FOR XT SERIES SIDE DISCHARGER		
Easy to install thanks to the FastAttach™ System, can be switched on/off from the driver's seat, Capacity: 45 kg, suitable for XT Series side-dischargers		Mod. no.: 19A30028100
TRANSPORT PLATFORM FOR XT SERIES SIDE DISCHARGER		
Foldable vertically and lockable in place, easy to install thanks to the FastAttach™ System, max. weight: 36 kg, suitable for XT Series side-dischargers		Mod. no.: 19A30029100
TOW BROADCAST SPREADER		
Capacity: 80 kg, weight: 26 kg, spreading width: up to 365 cm, dimensions (L/W/H): 109 / 96,5 / 104 cm		Mod. no.: 196-036-000
Capacity: 50 kg		Mod. no.: 196-545-000
Capacity: 39 kg, weight (approx.): 8 kg, spreading width: up to 300 cm, dimensions (L/W/H): 88,9 / 55,9 / 48,3 cm		Mod. no.: 196-031B000
LAWN TRACTOR COVER L/XL		
Size L: for small- and medium-sized lawn tractors		Mod. no.: 2024-U1-0003
Size XL: for large-sized and rear discharge lawn tractors		Mod. no.: 2024-U1-0004
BATTERY CHARGER		
Battery charger for LR, LT and XT Series		Mod.-Nr.: 196-967-678

